



<http://www.icact.org/>

- MAIN
- MESSAGE
- OBJECTIVES
- COMMITTEE
- SESSION OVERVIEW
- TUTORIAL I
- PLENARY SESSION
- TUTORIAL II
- TECHNICAL SESSIONS
- TECHNICAL SESSIONS
- AUTHOR INDEX
- REVIEWER LIST

THE 16th INTERNATIONAL CONFERENCE ON ADVANCED COMMUNICATIONS TECHNOLOGY

Content Centric Network Innovation Strategy!



Phoenix Park, PyeongChang,
Korea(South)
Feb. 16~19, 2014

IEEE Catalog Number: CFP 14561-CDR
ISBN : 978-89-968650-2-5
ISSN : 1738-9445



COPYRIGHT (C) 2013
BY GIRI
ALL RIGHTS RESERVED

Organizers



Sponsors



The Final Program of ICACT 2014 (Session Overview)

Day 1: Feb. 16 (Sunday)

15:00 ~ 18:00	Registration (Phoenix Ballroom Front Floor Desk)		
Time	Session	Topic 1 (Room - Phoenix I)	Topic 2 (Room - Phoenix III)
16:00 ~ 17:30	T1 Tutorial	Title: The Convergence of Content Centric and the Internet of Things: Prospective, Challenges and Opportunities Speaker: Prof. Dhananjay Singh, PhD, Hankuk (Korea) University of Foreign studies, Seoul, Korea	Title: Human-Centered Workflow Intelligence Speaker: Prof. Kwanghoon Pio Kim, PhD. - CTRL, Collaboration Technology Research Lab. Department of Computer Science, Kyonggi University, Korea

Day 2: Feb. 17 (Monday)

09:00 ~ 18:00	Registration (Phoenix Ballroom Front Floor Desk)							
Time	Session	A	B	C	D	F	G	P
		Ruby	Emerald	Diamond I	Diamond II	Phoenix III	Phoenix I	Phoenix II
10:00 ~ 11:30	Session 1	1A Mobile Communication 1	1B Information & Network Security 1	1C IPTV, Internet Telephony	1D Big Data, Game & Search Engine 1	1F Wireless Communication 1	1G	
	Chair							
11:30 ~ 13:00	Lunch							
13:00 ~ 14:30	Session 2	2A Mobile Communication 2	2B Information & Network Security 2	2C Smart Service 1	2D Big Data, Game & Search Engine 2	2F Wireless Communication 2	2G	2P Poster 1
	Chair							
14:30 ~ 15:00	Coffee Break							
15:00 ~ 16:30	Session 3	3A Ubiquitous & Sensor Network 1	3B Information & Network Security 3	3C	3D ICT Standard	3F Wireless Communication 3	3G	
	Chair							
16:30 ~ 17:00	Coffee Break							
17:00 ~ 18:00	<p style="text-align: center;">Plenary Session - Keynote Speech (Phoenix I, II) -</p> <p>Keynote 1. Korean ICT R&D strategy - Keynote speech (Speaker: Director Oh Sang-jin, Ministry of Science, ICT and Future Planning, Korea)</p> <p>Keynote 2. Advances and Challenges in Communication Infrastructures for Smart Grid (Speaker: Prof. Yi Qian, PhD. - University of Nebraska-Lincoln, USA)</p> <p style="text-align: center;">※ Presentation time is 30 Minute each</p>							
18:00 ~ 20:30	<p style="text-align: center;">Plenary Session - Opening Ceremony (Phoenix I, II, III)</p> <p>Welcome Address: Prof. Yanghee Choi, General Chair, Congratulatory address: Prof. Dae-Young Kim, TPC Chair</p> <p>Agenda of ICACT2014: Prof. Byeong-Nam Yoon, OOC Chair, ※ Toast for Opening Ceremony & Banquet</p>							

ICTACT2014 Final Program (16~19 Feb. 2014 In PaperNo Order)

Paper No	Speaker	Paper Title	Session	Date	Time	Session Title
20140007	Dr. idy diop	Adaptive Steganography scheme based on LDPC codes	2B-01	17-Feb	13:00	Information & Network Security 2
20140008	Mr. Junyeong Bok	Path Loss Model Considering Doppler Shift for High Speed Railroad Communication	1A-01	17-Feb	10:00	Mobile Communication 1
20140009	Mr. Jaeho Lee	Measurement Results of Frequency Offset in DVB-C2 Receiver	6P-01	18-Feb	15:00	Poster 3
20140011	Prof. Jing Li	The Integrated Management Method of Slow Varying ISL's for MEO Satellite Network	6C-01	18-Feb	15:00	Network Management 1
20140015	Dr. TAWFIG ELTAIF	Multi Premises Network Based on Spectral Amplitude coding Optical CDMA Systems	7A-01	19-Feb	10:00	Optical Network
20140017	Mr. Changkyu Lee	QoS Control Method in MMT and Its Implementation	4P-01	18-Feb	10:00	Poster 2
20140018	Prof. Heung-Gyoon Ryu	Diversity Method in the Chaos CDSK Communication System	7F-03	19-Feb	10:00	Wireless Communication 7
20140019	Mr. Naoya HONGO	Web Shopping Support System for Elderly People using WebRTC	6D-01	18-Feb	15:00	Systems & Software Engineering
20140020	Mr. Atsushi MORIKAWA	Ultrasonic Sensor System for Ecology Observation and Timing Synchronization of ZigBee Network	3A-01	17-Feb	15:00	Ubiquitous & Sensor Network 1
20140021	Mr. Ryoji AOKI	Android-based Navigation System for Elderly People in Hospital	3A-02	17-Feb	15:00	Ubiquitous & Sensor Network 1
20140022	Mr. Tatsuya Takahashi	Complex Event Processing to Detect Congestions in Mobile Network	6C-02	18-Feb	15:00	Network Management 1
20140023	Mr. Xing Fan	Road Side Unit Assisted Stochastic Multi-hop Broadcast Scheme for Instant Emergency Message Propagation	1F-01	17-Feb	10:00	Wireless Communication 1
20140024	Mr. Wei WAN	Investigation of State Division in Botnet Detection Model	2P-01	17-Feb	13:00	Poster 1
20140025	Mr. Donggyun Han	PADAC^2: Real-Time News Recommendation System with Heterogeneous Social Footprints	1D-01	17-Feb	10:00	Big Data, Game & Search Engine 1
20140027	Mr. Hyunsuk Roh	A Study on Mobile Virtualization System	4P-02	18-Feb	10:00	Poster 2
20140028	Mr. Ya Li	Reliable Energy-Aware Routing Protocol For Static Heterogegeous WSN Based On Beaconing	1F-02	17-Feb	10:00	Wireless Communication 1
20140029	Ms. nalakkhana khitmoh	A Subjective - VoIP Quality Estimation Model for G.729 Based on Native Thai Users	1C-01	17-Feb	10:00	IPTV, Internet Telephony
20140030	Mr. Sungchang Choi	Novel Distance Estimation Algorithm of Two-hop Neighbor in Wireless Sensor Networks	3A-03	17-Feb	15:00	Ubiquitous & Sensor Network 1
20140031	Ms. Thi Ha Phuong Tran	Data Synchronization Method in DTN Sensor Network	3A-04	17-Feb	15:00	Ubiquitous & Sensor Network 1
20140032	Mr. Nak Jung Choi	A Distributed Mapping Control of Identifiers and Locators for Future Mobile Internet	6A-01	18-Feb	15:00	NGN, BCN, Future Internet
20140033	Mr. Hyung-Woo Kang	Optimization of TAC Configuration in Mobile Communication System: A Tabu Search Approach	1A-02	17-Feb	10:00	Mobile Communication 1
20140034	Mr. Zhimu Huang	A Multipath Energy-Efficient Probability Routing Protocol in Ad Hoc Networks	1F-03	17-Feb	10:00	Wireless Communication 1
20140035	Prof. Cheng Tao	Geometrical Channel Characterization for High Speed Railway Environments Using Propagation Graphs Methods	2F-01	17-Feb	13:00	Wireless Communication 2
20140037	Seung-Ik Lee	Modeling user situations with smartphones	2C-01	17-Feb	13:00	Smart Service 1
20140038	Mr. mohsen kazemian	Peak-to-Average Power Ratio Reduction Based on Cross- Correlation in OFDM Systems	2F-02	17-Feb	13:00	Wireless Communication 2
20140039	Dr. Julian Webber	Adaptive Frequency Offset Estimation for Practical Satellite Communication Channels	2F-03	17-Feb	13:00	Wireless Communication 2

Optimization of TAC Configuration in Mobile Communication Systems: A Tabu Search Approach

Hyung-Woo Kang*, Hyon-Goo Kang**, Seok-Joo Koh*

*School of Computer Science and Engineering, Kyungpook National University, Korea

**Access Network Lab, SK Telecom, Korea

hwkang0621@gmail.com, hyongoo.kang@sk.com, sjkoh@knu.ac.kr

Abstract— Recently, the mobile communication has been rapidly changing the LTE-based mobile communication. In LTE-based mobile communication system, paging performance is a critical factor to be considered, a paging area is defined as TAC, which is group of cells. In this paper, we propose a new scheme for configuration of TAC to maximize the paging success rate. This scheme constructs a TAC using traffic load, TAC size and handover patterns. Then we propose the improvement algorithm using tabu search. From the performance analysis with real traffic data of Seoul in Korea, we can see that the proposed TAC configuration provides larger paging success rates than the existing TAC configuration.

Keywords— Mobile Network System, Paging, Tracking Area Code, Optimization, Tabu Search

I. INTRODUCTION

With the prevalence of smart phones, mobile communication has been rapidly evolved to the Long Term Evolution (LTE) [1, 2]. In LTE-based mobile systems, the paging performance is one of the important factors to be considered [3, 4]. The paging operation is initiated to locate a mobile user in the network, when a call request to the user arrives. In the LTE-based mobile systems, a paging area is defined by a Tracking Area Code (TAC).

In this paper, we propose a new scheme configuration of TACs to improve the paging success rate. A TAC consists of a group of cells to which a paging signal is broadcast in the paging process. The proposed scheme is based on a mathematical optimization model for TAC configuration, in which we consider the mobility (handover) patterns of mobile users as well as the TAC size and the capacity of paging traffic. Then, we propose the improvement algorithm for TAC configuration to maximize the paging success rate, while some constraints are satisfied.

This paper is organized as follows. In Section 2, we discuss the TAC configuration and the paging operations. In Section 3, we describe an optimization model for TAC configuration and pro-posed TAC configuration algorithm. Section 4 analyzes the paging performance of the existing and proposed schemes in terms of the paging success rate, with the real traffic data. Finally, Section 5 concludes this paper.

II. OPTIMIZATION MODEL

Figure 1 shows an example of TAC configuration in mobile network. In this figure, there are 11 TACs in a network area, and a group of cells are assigned to a TAC. TAC is encoded with a 2-bytes hexadecimal digit (e.g., 010A), in which the first byte (e.g., 01 in the example) represents the associated network area, and the second byte (0A) is used to identify the TAC in the area.

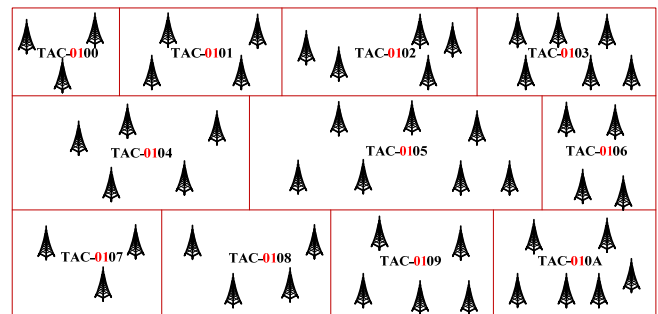


Figure 1. Example of TAC Configuration

With such TAC configuration, when a paging request to a specific user arrives, the paging operations are performed as follows. In the first paging, the paging request message (or signal) will be broadcast to the cells contained in the TAC. If the paging request fails (i.e., no response to the paging request from the mobile user), then the second paging is performed, in which the paging request will be broadcast to all of cells in the area. Therefore, it is important to optimize the TAC configuration so as to maximize the paging success rate of the first paging and thus to reduce the paging traffics generated in network.

At present, most of the mobile operators configure the TAC in an arbitrary way, in which only the geographical location information of all cells are considered and the network manager manually configures a group of cells as a TAC. That is the mobility or handover pattern was not considered in the TAC configuration. So, if the user has already moved to another cell during the dormant mode, the actual TAC of the user may be changed and thus it is likely that the first paging process fails.

Recently, the Self-Organizing Network (SON) system is used in the LTE-based mobile communication system in order to automatically configure and manage a mobile network. SON network, which adapt itself to environment, has characteristics that self-configuration, self-service, self-knowledge, self-awareness and maintenance. In this paper, for TAC configuration, we propose the optimization algorithm which is applied on SON system. The proposed scheme is designed by considering the mobility (handover) patterns of mobile users as well as the TAC size and the capacity of paging traffic. Figure 2 shows the overview of SON system.

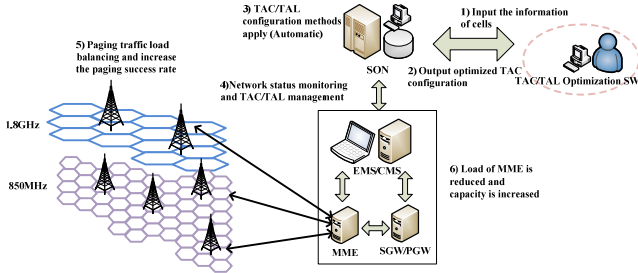


Figure 2. Overview of SON System

For TAC optimization, we first make a mathematical optimization model for TAC configuration.

- h_{ij} : handover ratio that a user moves from cell i to cell j , where $\sum_{j \in N} h_{ij} = 1$;
- λ_i : average paging traffic load for cell i , which is calculated as the number of RRC connections established in the cell;
- N : a group of total cells in the area, with the size of n ;
- M : a group of TACs in the area, with the size of m ;
- S_{TAC} : the maximally allowable number of cells for a TAC;
- C_{TAC} : the maximum paging traffic load allowable for a TAC;
- x_{ik} : a decision variable, $x_{ik} = 1$ if cell i is assigned to TAC k , $x_{ik} = 0$ otherwise.

Based on these variables and parameters, we can make an optimization model for TAC optimization, as shown in Figure 3.

Maximize $\sum_{k \in M} \sum_{i \in N} \sum_{j \in N} \lambda_i \times h_{ij} \times x_{ik} \times x_{jk}$

Subject to (constraint conditions)

$$\sum_{k \in M} x_{ik} = 1, \text{ for all } i \in N \quad (1)$$

$$\sum_{i \in N} x_{ik} \leq S_{TAC}, \text{ for all } k \in M \quad (2)$$

$$\sum_{i \in N} \lambda_i \times x_{ik} \leq C_{TAC}, \text{ for all } k \in M \quad (3)$$

$$x_{ik} = 1 \text{ or } 0, \text{ for all } i \in N, k \in M \quad (4)$$

Figure 3. TAC Optimization Model

In this model, the objective function represents the PSR that is defined as the ratio of $\lambda_i \times h_{ij}$ in which a user moves cell i to

cell j , and both i and j are assigned to the same TAC k (i.e., $x_{ik} = 1$ and $x_{jk} = 1$).

In addition, we consider the following three constraints:

- (1) TAC assignment: each cell should be assigned to one TAC;
- (2) TAC size: the number of cells assigned to a TAC cannot exceed S_{TAC} ;
- (3) Paging traffic capacity: the paging traffic load for a TAC cannot exceed C_{TAC} .

It is noted that this optimization problem is similar to the knapsack problem, which is known as an NP-complete problem [5]. The TAC optimization problem can be reduced to the knapsack problem by considering only a single TAC (i.e., $m=1$) and by taking only the constraints (3) and (4). Accordingly, we use heuristic algorithms such as tabu search to solve the TAC optimization problem

III. PROPOSED TABU SEARCH

A. Overview of Tabu Search

Tabu search is a heuristic search method and a local search strategy with a flexible memory structure [6-11]. Tabu restricts some search of neighboring solution. Local (neighbourhood) searches take a potential solution to a problem and check its immediate neighbors (that is, solutions that are similar except for one or two minor details) in the hope of finding an improved solution.

Tabu search enhances the performance of these techniques by using memory structures that describe the visited solutions or user-provided sets of rules. Tabu search uses a local or neighbourhood search procedure to iteratively move from one potential solution x to an improved solution x' in the neighbourhood of x , until some stopping criterion has been satisfied.

The overall approach of tabu search is to avoid entrainment in cycles by forbidding or penalizing moves which take the solution, in next iteration, to points in the solution space previously visited (hence "tabu"). Tabu search always move to the best available neighborhood solution point, even if it is worse than the current solution point. The solutions are not in the tabu list, or in tabu list but satisfy aspiration condition.

In tabu search, we consider two factors that are tabu list and tabu size. Tabu list maintains a list of solution point that must be avoided (not allowed) or a list of move attributes that are not allowed. Tabu size is length of tabu list. That is, tabu size is defined that how many tabus consider. Stopping criterion is also important. According to stopping criterion, more optimized solution can be found.

B. Initial TAC Configuration

Before optimization, we think about initial TAC configuration that uses existing TAC configuration used in mobile network. Based on the really used existing TAC configuration, Tabu search algorithm performed.

C. Definition of Move for Tabu Search

For improve paging success rate, proposed TAC configuration use tabu search. Move of tabu search is defined that a cell of specific TAC moves to another TAC where maximize PSR. The move is performed to all the cells in the area. This move procedure continues until a stopping criterion is satisfied.

Figure 4 shows example of move procedure.

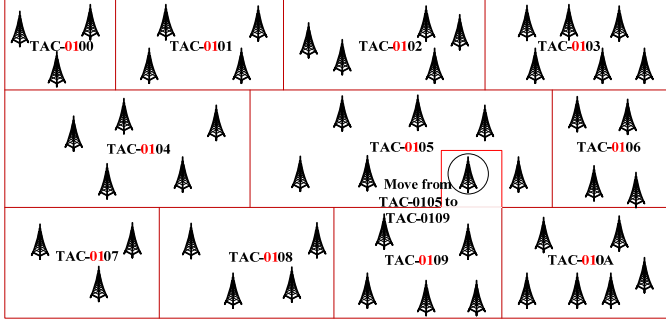


Figure 4. TAC Configuration Algorithm for Tabu Search

D. Tabu Size and Stopping Criterion

Tabu size is defined 50, 100, 150 and 200. That is, 50, 100, 150 and 200 cells can be stored in tabu list.

Proposed scheme is stopped if PSR doesn't improve 40 times sequentially.

E. Overall Algorithms

To solve the TAC optimization problem, we propose the improvement algorithm using tabu search. The proposed algorithm for improvement of TAC configuration is described in Figure 5.

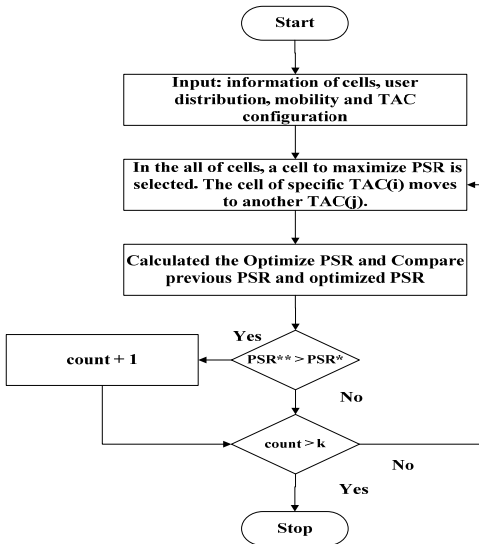


Figure 5. TAC Configuration Algorithm for Tabu Search

As input to existing TAC configuration, we consider the mobility ratio and paging traffic per cell. Based on the configuration obtained by randomly or existing configuration, we try to change the TAC of a cell to another TAC. After executing the TAC change process about all cells, we select a cell, which is maximize PSR and feasibility condition is satisfied and move it. This is one move in improvement algorithm.

After one move, the cell which is moved added in tabu list. Tabu list save the m cells (the m is called tabu size) that is moved recently. When the next move, we don't consider the cells in the tabu list.

This improvement algorithm is repeated until if the PSR value is not improved continuously k times. k is stopping criterion and count is values of stop count. If solution PSR is lower than previous PSR, stop and count increase. The previous PSR denoted by PSR** and optimized PSR denoted by PSR* in Figure 5.

IV. EXPERIMENTAL RESULTS

A. Test Network Environments

In experiments for performance analysis, we use the real-world data of network topology, user paging traffic, and mobility rates, which are given by SK Telecom in Korea. The proposed TAC configuration scheme was applied to a target area, and we calculate the PSR values.

For experiments, the default parameter values are set as follows: $S_{TAC} = 120$, $C_{TAC} = 2100$.

B. Test Results and Discussion

In experiments, we calculate the *paging success probability (PSP)* = $PSR / \sum_{i \in N} \lambda_i$, which represents the ratio of successfully paged traffics over total paging traffics in the network.

Figure 6 shows change of the PSP for target area 43. Tabu size is set 200 cells. The graph shows that from the hundredth to the 11 hundredth moves for tabu search.

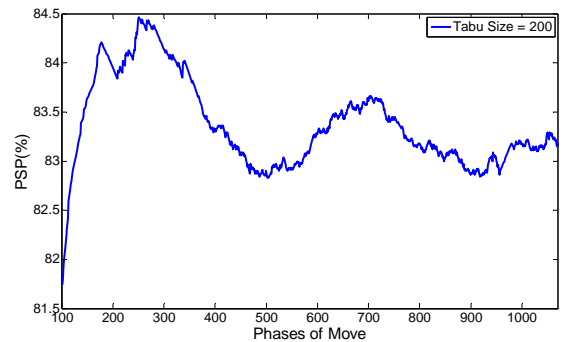


Figure 6. TAC Optimization for Tabu Search using Tabu size 200

Table I shows the results of the existing and proposed TAC configuration schemes for the target area 43, which has n

(total number of cells) = 1610 and m (the number of TACs) = 15.

TABLE 1. COMPARISON EXISTING TAC CONFIGURATION AND PROPOSED TAC CONFIGURATION

Font Size	Existing TAC Configuration		Proposed TAC Configuration	
	# of Cells	PTL	# of Cells	PTL
4300	119	857	46	68
4301	77	830	120	1337
4302	54	402	66	552
4303	76	575	103	833
4304	77	782	96	960
4305	125	794	96	513
4306	43	248	47	250
4307	75	402	74	383
4308	97	677	100	747
4309	81	576	79	513
430A	39	97	41	112
430B	125	500	125	500
430C	198	410	198	410
430D	268	875	268	875
430E	156	346	151	318
Total	1610	8371	1610	8371
PSP	70.26		84.21	

For the existing TAC configuration in the table, the PSP calculated 70.26. The proposed TAC configuration provides the PSP of 84.21%, which is higher than the existing scheme by 13.95%.

Because S_{TAC} is defined as 120 cells, a cell in area does not move to the TAC, which consists of more than 120 cells. Table 1 shows that all of cells in area dose not move to the TAC, which consists of more than 120 cells.

Figure 7 shows the improvement of PSP for Area Code 43. All the case, PSP improves more than existing TAC configuration. At the tabu size = 50, PSP is improved to 120.48% and tabu size = 200, PSP is improved to 119.85. That is, too large tabu size is inefficient to PSP improvement.

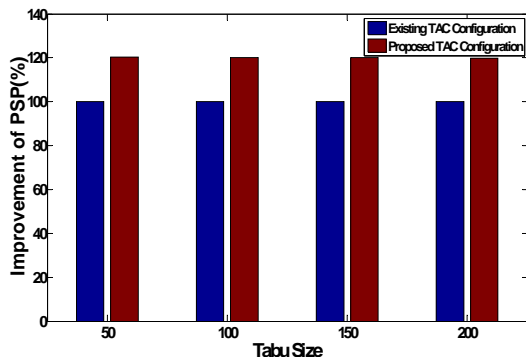


Figure 7. Improvement of PSP for Area 43

Figure 8 shows the geographical distribution of cells in the target area 27, in which the cells are depicted with the same shape for each of TACs. From the figure, we can see that the proposed scheme (Fig. 8(a)) gives more compact and balanced TAC configurations than the existing scheme (Fig. 8(b)). This is because the proposed scheme gives the TAC configuration by considering the feasibility conditions, while PSP is maximized

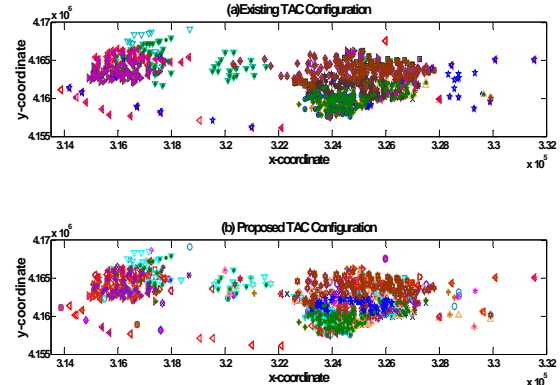


Figure 8. Geographical Distribution of TACs for Area 43

V. CONCLUSIONS

In this paper, we presented a new TAC configuration scheme to maximize the paging success rates in mobile communication systems, with tabu search.

By experimentations with real-world data of SK Telecom in Korea, the proposed scheme is compared with the existing scheme in terms of the paging success rate. From the results, we can see that the proposed scheme provides more optimized TAC configurations than the existing scheme by maximizing the paging success rate. It is also noted that the proposed scheme can give much more balanced TAC configurations, compared to the existing scheme.

ACKNOWLEDGMENT

This research was supported by the Basic Science Research Program of NRF(2010-0020926).

REFERENCES

- [1] S Astély David, et al., "LTE: the evolution of mobile broadband," IEEE Communications Magazine, Vol. 47, No. 4 (2009): 44-51.
- [2] 3GPP TS 36.300, Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN): Overall Description Stage 2, 2008.
- [3] Lyberopoulos George L., et al., "Intelligent paging strategies for third generation mobile telecommunication systems," IEEE Transactions on Vehicular Technology, Vol. 44, No.3 (1995): 543-554.
- [4] Bar-Noy Amotz, et al., "Paging mobile users in cellular networks: Optimality versus complexity and simplicity," Theoretical Computer Science, Vol. 470 (2013): 23-35.
- [5] Richard Johnsonbaugh and Marcus Schaefer, Algorithms, Prentice Hall, 2004.
- [6] Gendreau, Michel, and Jean-Yves Potvin. "Tabu search." Search methodologies. Springer US, 2005. 165-186.


- [7] Seok-Joo Koh, "A Tabu Search Approach for the Survivable Fiber Optic Communication Networks Design", Department of Management Science, 1994.
- [8] Seok-Joo Koh, "Design and Management of Survivable Communication Networks in B-ISDN Environments", Department of Industrial Engineering, 1998.
- [9] F. Glover, "Tabu Search: A Tutorial", *Interfaces*, Vol. 20, No.4 (1990), 74 – 94.
- [10] F. Glover, "Tabu Search – Part 1", *ORSA Journal on Computing*, Vol. 1 (1989), 190 - 206.
- [11] F. Glover, "Tabu Search – Part 2", *ORSA Journal on Computing*, Vol. 2 (1990), 4 – 32.



Hyung-Woo Kang received B.S degree in Computer Science from Kyungpook National University in 2011. He is now a Master course in School of Electrical Engineering and Computer Science from Kyungpook National University. His current research interests include mobile communication systems.



Hyon-Goo Kang received B.S. degree in Mathematics and M.S. degrees in Industrial Engineering from KAIST in 1996 and 1998. He also received Ph.D. degree in Industrial Engineering in KAIST in 2003. From 2003 to 2011, he worked for WiMAX and LTE System Design and SW Development in Samsung Electronics. Since 2011, he has been with the Access Network Lab in SK Telecom, as an R&D Manager, Ph.D. E-mail: hyongoo.kang@sk.com



Seok-Joo Koh received B.S. and M.S. degrees in Management Science from KAIST in 1992 and 1994, respectively. He also received Ph.D. degree in Industrial Engineering from KAIST in 1998. From August 1998 to February 2004, he worked for Protocol Engineering Center in ETRI. Since March 2004, he has been with the school of Electrical Engineering and Computer Science in the Kyungpook National University as an Associate Professor. His current research interests include mobility control in Future Internet, mobile SCTP, and mobile multicasting. He has also participated in the International Standardization as an editor in the ITU-T SG13 and ISO/IEC JTC1/SC6.